


TECHVENT[®]
Performance... Rain or Shine.

FEATURES

- Provides massive natural ventilation and daylighting.
- Can be left open during normal rainfall!
- Perfect for new construction or retrofit.
- Continuous “wings” of windows up to 150’ long.

TECHVENT® CONFIGURATION

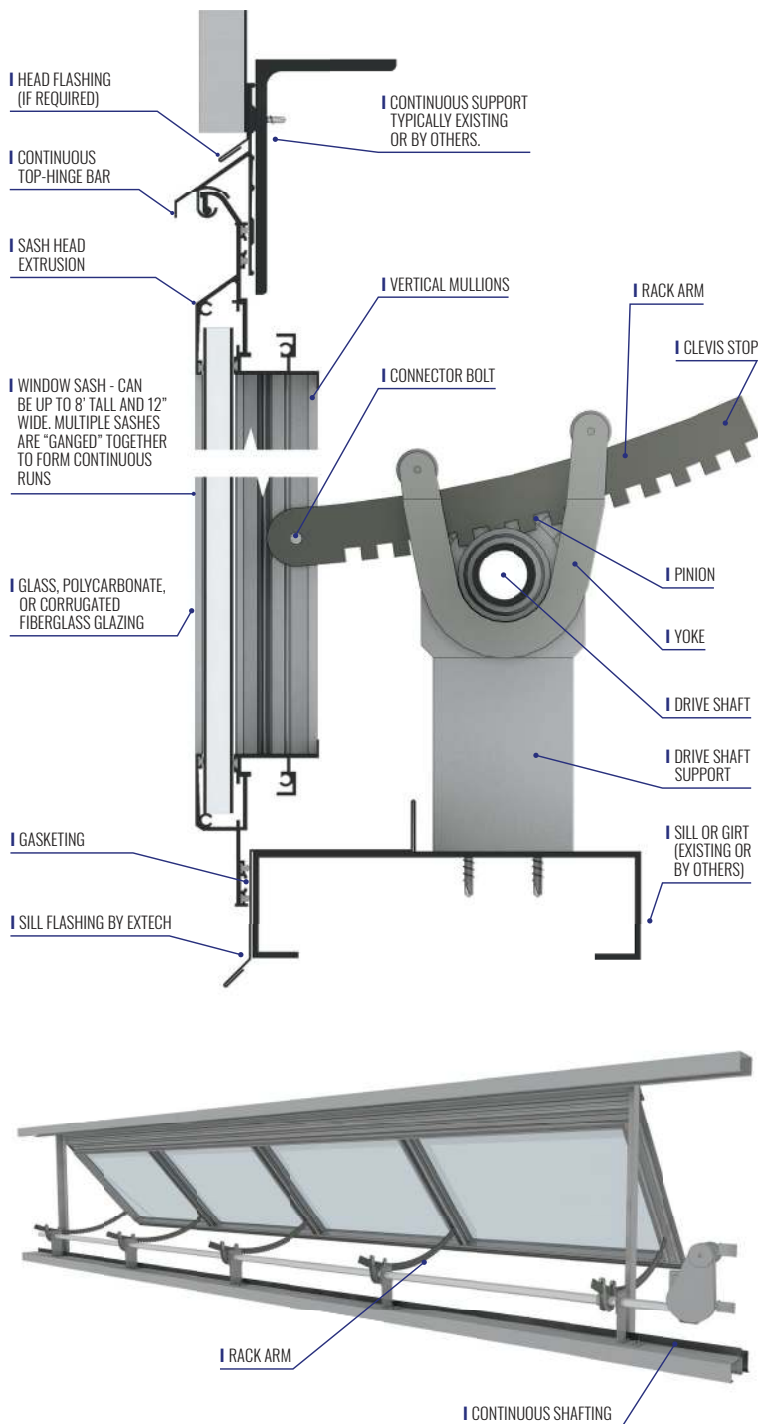

A NATURAL CHOICE

- Natural light and massive natural ventilation. Does much more than a louver.
- Patented design allows operating windows to be left open during normal rainfall.
- Operated manually or electrically (with optional control systems).
- Optional thermally broken framing.

WEATHERS THE STORM

- Robust construction holds up to abusive industrial environments.

FLEXIBLE AND DURABLE

- Vents available in individual units or in "wings" up to 150'0" wide.
- Typical height of 3'0" to a maximum of 8'0".
- Operating hardware:
 - Manual push bar type
 - Manual mechanical operators (chain pull or hand crank - rack and pinion type)
 - Electric mechanical operators
- Accepts glass or polycarbonate glazing up to 1" thick.
- Available with Class A polycarbonate glazings with an R-3.8 insulating factor.
- Finish on aluminum framing can be your choice of anodized or high-performance factory baked paints.
- Continuous units — factory assembled sections feature interlocking vertical mullions.
- Deep glazing pockets (rabbet depth) accommodate thermal movement of polycarbonate glazing.
- "Dry glazed" — incorporates low friction gasketing to maintain good air and water infiltration seals, while allowing for thermal movement of the polycarbonate glazing.
- Can be incorporated into various other EXTECH wall systems.
- Fast installation from the exterior or interior, allowing for minimal disruption to building operations.